

□ □ □ □ □ □ □ □ □ □ □ □ □







- 0000000
- 00000000“00”
- 000000
- AOpen0000

[illegible]

```
00000000      0000000000000000...  
0000000000 "00"  
000000  
AOpen0000  
000000
```

□ □ □ □ □ □ □ □ □ □ □ □ □



- 
- 
- 
- 

□□□□8□□□□□□□41.08...
“□□”□□□□□□□□□□...
□□□□□□□□□□□□□□□□...
□□“□□□□”□□□□□
□□□□□□□□ □□□□“□□...
□□□□□□□□□□□□□□□□

□ □ □ □ □ □



-
- Figure 1 illustrates a sequence of data segments represented by rectangular blocks. The segments are arranged in four rows, separated by dotted lines. The first row contains 10 blocks. The second row contains 10 blocks, followed by a double quote, 3 blocks, and three dots. The third row contains 10 blocks followed by three dots. The fourth row contains 3 blocks, followed by a double quote, 3 blocks, and a double quote.

00000000000000000000 00000000 00000000 00... 00000000000000000000... 00000000 00000000 00“00” 0000	0000000000 000000000000 00000000... 0000“00”000000 000000000000 000000 000000000000
--	---

□ □ □ □ □ □



<p>0000000000000000“00...</p> <p>110000000000000000</p> <p>000000000000000000...</p> <p>000000000000000000</p> <p>0000“00“0000 00000”...</p>	<p>000000000000</p> <p>0003D0000 00000000...</p> <p>000000000000 00000...</p> <p>0000:00ISO900000000000...</p> <p>00000“0000”000“00...</p>
--	--



□□ □□ □□ □□ □□□ □□



- [illegible]

315□□ □□□□ □□□□

□□ □□ □□ □□ □□□ □□




- □□□□□□□□
- □□□□□□□□□□“□□”
- □□□□□□□□
- AOpen□□□□

```

0000000000000000
0000000000000000...
0000000000000000
000000000000
000000000000


```

□□ □□ □□ □□ □□□ □□

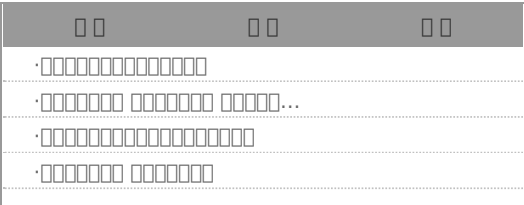

<p> 0000000000000000 0000000 0000000 00... 000000000000000000... 00000000 00000000 00“00” 00000 </p>	<p> 0000 0000000 00000000000 0000000... 0000012315000000000... 000000000000“0000”... 0000000000000000000... </p>
--	---

□□ □□ □□ □□ □□ □□

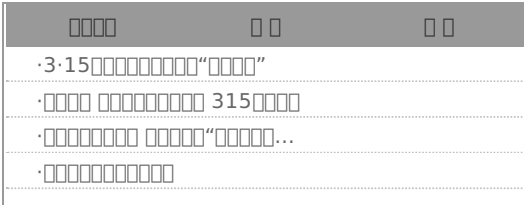[illegible][illegible]

 不良信息
举报中心



北京网络
行业协会

 网络110
报警服务

Copyright 2008-2020 315chn.com. All rights reserved.

□□□□□□□□□□□□□□□□□□□□ □ICP□08010763□-1